

Traffic Light Phase Timings			
Phase 1: A10 Royston Road, (N)	Red	20s	↗
	Green	45s	
Phase 2: A10 Royston Road, (S)	Red	20s	↘
	Green	45s	

Note: Timings may only be adjusted by a competent operative to suit traffic conditions if required

KEY

- Cone
- Sign
- ▨ Work area
- ↑ Traffic light head
- 1 Traffic light phase

DETAIL B

Single/Dual carriageway 40mph or less - 450mm traffic cones, spacing 1.5m.
Single/Dual carriageway 50mph or more - 750mm traffic cones, spacing 1.5m.
Dual carriageway national speed limit - 750mm traffic cones, spacing 1.5m, relaxation 3m.

Notes:

- 1) During darkness, warning lights to BS EN 12352:2006 should be provided in accordance with Table A1.3 (Appendix 1).
- 2) 45 degree tapers have 1.5m spacing and no relaxations.
- 3) On motorways and NSL AP duals with hard shoulders, 1m cones will be required for both standard and relaxation works for lead tapers and the facing wall of lane changes.

DETAIL C2

Single carriageway 40mph or less - 450mm traffic cones.
Single/Dual carriageway 50mph or more - 750mm traffic cones.

Notes:


- 1) During darkness, warning lights to BS EN 12352:2006 should be provided in accordance with Table A1.3.

Min width of sideways safety zone (S)	1.2 m	1.2 m		
Min length of longways clearance (L)	30 m	60 m		
Speed of the road	50	50		
Rev	Description	By	Chk	Date

Client:

Project:
A10 Royston Road,
Cambridge, SG8 6QT
Grid Ref: (x)539997 ; (y)247491

Title:
Temporary Two Way
Traffic Lights And Road
Closure

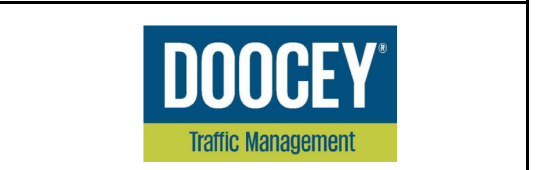

Design: ACW	Drawn: ACW	Chkd: RB
Date: 05/11/20	Date: 05/11/20	Date: 05/11/20
Scale: A3 - NTS	Status: Proposed	
Drawing No	DTM1509 - 004	
	Rev: -	